

# Product Data Sheet

## PERMALIGHT® Photoluminescent Aluminum Framed Plastic EXIT Sign

SKU's: 600126, 600127, 600128, 600129, 600111, 600112, 600113, and 600114

### Product Description

PERMALIGHT® aluminum framed exit signs are energy-efficient, UL924-listed exit sign with a 50-foot viewing distance. Each sign includes two self-adhesive chevrons for on-site directional application. No wiring or maintenance required. Ideal for code-compliant egress marking.

<b>Single Sided (Silver Frame):</b>	<b>Double Sided (Silver Frame):</b>	<b>Single Sided (Black Frame):</b>	<b>Double Sided (Black Frame):</b>
• 600126 (green lettering)	• 600128 (green lettering)	• 600111 (green lettering)	• 600112 (green lettering)
• 600128 (red lettering)	• 600129 (red lettering)	• 600113 (red lettering)	• 600114 (red lettering)

### Product Specifications

- **UL Model:** 600117 & 600118
- **Material class:** HPVC, photoluminescent, PERMALIGHT® Power 450/60
- **Dimensions:**
  - Height: 9 inches
  - Width: 14-5/8<sup>th</sup> inches
- **Temperature resistance:** -20°C to +50°C
- **Outdoor durability:** 2 years\*
- **Indoor durability:** Virtually Unlimited



\* Printed sign under vertical outdoor exposure and Central European standard climate conditions.

#### Durability in Outdoor Use – Assessment after 2 Years of Weather Exposure

- Overall appearance: Surface slightly duller, sign remains flat and smooth.
- UV stability and color retention: Colors slightly faded, readability 100% maintained.
- Overall assessment: The entire combination withstands 2 years of outdoor use.

#### Luminance Values (DIN 67510 and UL924)

Luminance 10 min after light outage	Luminance 60 min after light outage	Classification by manufacturer *** (10/60 min value)
450 mcd/m <sup>2</sup>	60 mcd/m <sup>2</sup>	Class D (260/35 mcd/m <sup>2</sup> )

\*\* According to DIN 67510-1:2020 – Long-lasting photoluminescent pigments and products, measurement and classification by the manufacturer.

# Application and Use

---

**PERMALIGHT®** Photoluminescent EXIT Signs are made for both high and low placement in commercial, industrial, and public buildings. Commonly installed in stairwells, corridors, and exit passageways, they help improve visibility and safety during power outages or low-light conditions.

Approved for use in code-regulated environments, including:

- IBC and IFC compliant buildings
- NFPA 101 Life Safety Code applications
- OSHA 1910.37(b)(6) compliant settings
- GSA facilities following Standard P100

These UL924 listed signs require a minimum of 5 foot-candles (54 lux) of fluorescent lighting during occupancy. Each sign is impact-tested and designed for reliable performance. They can be installed using a ceiling mount or perpendicular wall mount accessory as seen below.

### Required Accessories:

**600055:** Bracket for Ceiling or Perpendicular Mount


- 1.5 inches away from Ceiling or Side Wall

**600056:** Extended Ceiling Mount

- 10 inches away from Ceiling

**600057:** Extended Ceiling Mount

- 19.5 inches away from Ceiling

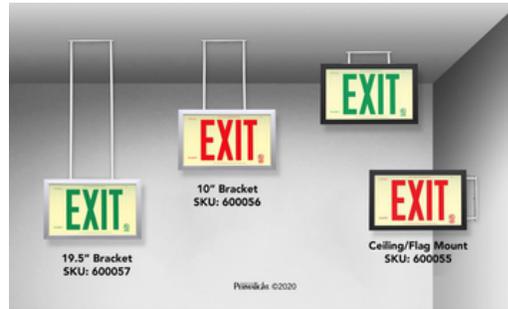

## Benefits of **PERMALIGHT®** Photoluminescent Plastic EXIT Signs

---

- Requires no electricity and supports sustainable building design
- Save up to \$1,100 per sign over 25 years compared to electrical exit signs, with no electricity or battery replacements required.
- Safe to use, non-toxic and non-radioactive
- No disposal costs or special handling required
- Lightweight and easy to reposition if egress routes change
- Provides consistent and uniform EXIT legend visibility
- Visible from up to 50 feet
- Made from recyclable plastic
- Contributes to LEED certification
- Budget-friendly solution for emergency exit signage
- Built to last with a durable printed design

## Cleaning Instructions

---

- Use a damp cloth soaked in a mild alkaline cleaning solution (e.g., dishwashing detergent).
- Do not use abrasive cleaning agents (e.g., scouring agents), alcohols, or solvents.

## Storage Instructions

---

- When stored in the original unopened packaging at 23°C / 50% relative humidity and protected from sunlight, the product has a shelf life of 2 years.
- Mechanical damage and sharp bending should be avoided.
- Failure to comply with these storage guidelines may reduce the product's lifespan.

# CERTIFICATE OF COMPLIANCE

**Certificate Number** SA10061  
**Report Reference** SA10061-20011130  
**Issue Date** 2020-NOVEMBER-20

**Issued to:** AMERICAN PERMALIGHT INC  
2570 W 237TH ST STE C  
TORRANCE, CA 90505-5276 UNITED STATES

**This certificate confirms that  
representative samples of**

EXIT SIGNS, SELF-LUMINOUS AND  
PHOTOLUMINESCENT

USL, CNL - Photoluminescent Exit Signs, models 600117,  
600118, 600117F and 600117S, 600118F and 600118S.

Have been investigated by UL in accordance with the  
Standard(s) indicated on this Certificate.

**Standard(s) for Safety:** ANSI/UL 924, Emergency Lighting and Power Equipment.  
CAN/ULC-S572, Photoluminescent and Self-Luminous Exit  
Signs and Path Marking Systems.

**Additional Information:** See the UL Online Certifications Directory at  
<https://iq.ulprospector.com> for additional information.

This *Certificate of Compliance* does not provide authorization to apply the UL Mark. Only the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.



Bruce Mahrenholz, Director North American Certification Program

UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at <http://ul.com/aboutul/locations/>

